

TRIM-TEX

DRYWALL PRODUCTS


Super Seal Tear Away L Bead

Use to seal around windows, doors, and where drywall butts up to a concrete wall. Gasket compresses upon installation to form a permanent seal that reduces sound transmission, replaces caulk, and provides structural relief at the panel perimeter.

Installation Instructions

- Step 1:** Ensure that there is a $\frac{1}{4}$ " gap between the edge of the drywall and the opposite substrate. Measure and cut the bead to length. Dry fit to test proper cut.
- Step 2:** Spray the bead and corner with 1 coat each of Trim-Tex 847 Spray Adhesive and position the bead into place.
- Step 3:** Once in position, pressure the leg using a Trim-Tex installation tool or the handle of your taping knife.
- Step 4:** Staple the mud leg into place every 6"-8" with $\frac{1}{2}$ " staples.
- Step 5:** Mud as usual. Be sure to use All-Purpose or Multi-Purpose Compound. Add Mud-Max to your drywall compound for extra durability.
- Step 6:** Remove the tear-off strip after mudding but before sanding. Prime and paint as usual.

If more than a" of compression is expected, install the product the appropriate distance from the surface and fill the void with caulk. A typical example is a precast concrete floor that may deflect under load or due to concrete creep.

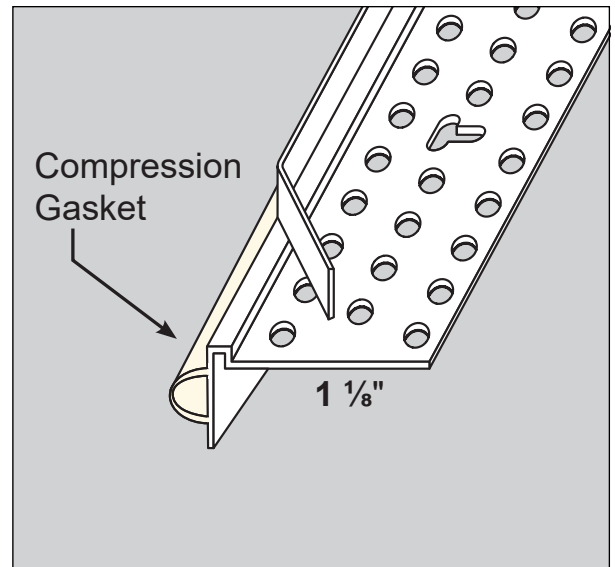

STOCK #	NAME	PCS/BOX
9210	$\frac{3}{8}$ " SUPER SEAL 10'	25

