

HOTROD TYPE-X

STOCK#	NAME	PCS/BOX
#9284	Hotrod Type-X 1/2" X 1"	20
#9285	Hotrod Type-X 1" X 1"	10

Description: HOTROD TYPE-X is a compressible intumescent firestopping that provides 1 and 2 hour fire-ratings for both dynamic and static joints according to UL-2079 5th edition on both concrete and fluted decks without spray over mineral wool. (For both standard walls and shaft walls) It is also sound tested according to ASTM E90, tested up to a STC 68.

Advantages: Maintains flexibility for the life of the interior building joint and will not shrink or pull away or harden over time. Will resist oil, gasoline and most solvents. The material is odorless, will not stain, and the open cell composition prevents out-gassing.

Limitations: Product is designed for interior use.

Surface Characteristics: Rectangular profile that is red in color and is easily identified by the inspector.


Installation: Ensure wall sections are built to UL 2079 specifications. Detailed installation instructions can be found at www.Trim-Tex.com.

Accessories: Safety Products distributed by Trim-Tex.

ASTM & Code Standards:

ASTM E 1966: Standard Test Method of Fire Tests of Firestop Systems – UL 2079 5th Edition Tests for Fire Resistance of Building Joints.

- ASTM E-119 Standard Test Methods for Fire Tests of Building Construction and Material.
- Intumescent Firestopping tested per ASTM E 84 UL723, Flame Spread 5, Smoke Index 5.
- UL listings/approvals – HW-D-0624; HW-D-0625; HW-D-0554; HW-D-0550; BW-S-0024; WW-D-0104; WW-S-0057; HW-D-0514; HW-D-0518; HW-D-0524; HW-D-0652; HW-D-0620; HW-D-0573; HW-D-0525; HW-D-0553; HW-D-0621; WW-S-0061.
- IBC: 2012, 2015, 2018
- CBC: 2013, 2016
- AISI: S100-07, S100-16, S220-11, S220-15
- U.S. Patent No. US 9,683,364 and US 10,184,246

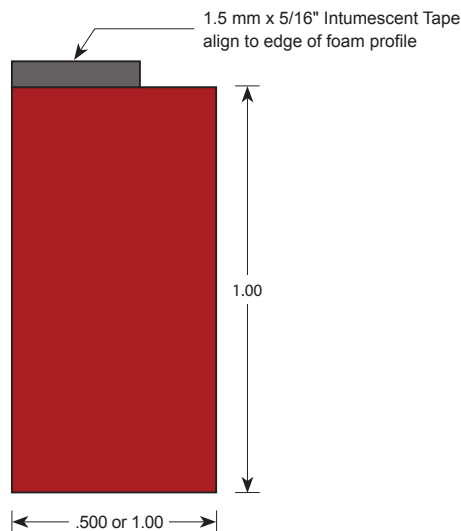

Job Name _____

Contractor _____

Date _____

Approvals (Signatures or Stamps)